

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



533 473

(43) International Publication Date
17 June 2004 (17.06.2004)

PCT

(10) International Publication Number
WO 2004/051473 A2

(51) International Patent Classification⁷: **G06F 9/46**

(21) International Application Number:
PCT/GB2003/003567

(22) International Filing Date: 14 August 2003 (14.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0227825.7 29 November 2002 (29.11.2002) GB

(71) Applicant (for all designated States except US): **INTERNATIONAL BUSINESS MACHINES CORPORATION** [US/US]; New Orchard Road, Armonk, NY 10504 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FUENTE, Carlos,**

Francisco [GB/GB]; 43 White Hart Road, Portsmouth, Hampshire PO1 2TY (GB). **SCALES, William, James** [GB/GB]; 5 Portchester Road, Portchester, Fareham, Hampshire PO16 8AD (GB).


(74) Agent: **BURT, Roger, James;** IBM United Kingdom Limited, Intellectual Property Law, Hursley Park, Winchester, Hampshire SO21 2JN (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: **HIGH-PERFORMANCE LOCK MANAGEMENT FOR FLASH COPY IN N-WAY SHARED STORAGE SYSTEMS**

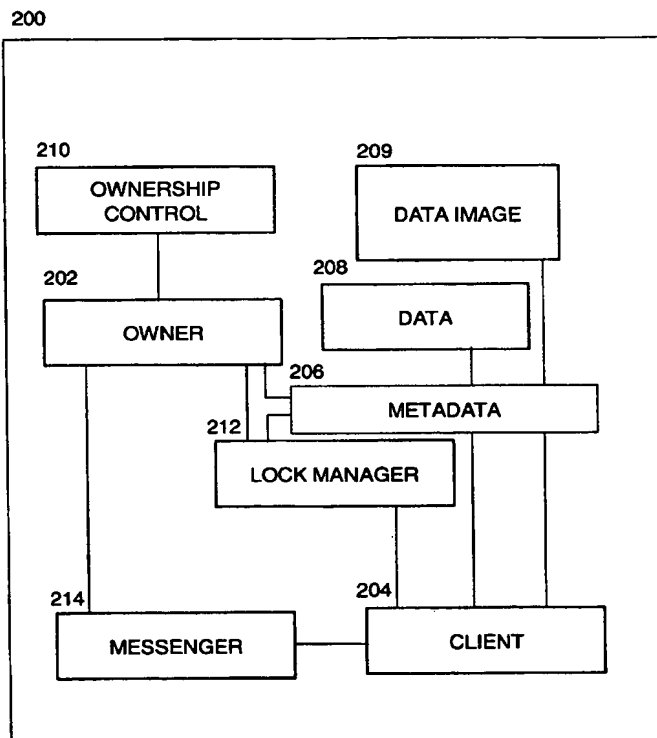

(57) Abstract: Storage control apparatus is operable in a network of storage controller nodes having an owner node operable to control locking of a region of data during I/O activity, a messaging component operable to request locks, grant locks, request release of locks and signal lock release. The apparatus comprises an I/O performing component to perform I/O on data owned by any owner node, subject to compliance with lock protocols controlled by the owner node. Any Flash Copy image of the region of data is maintained in a coherency relation with the region of data, and the I/O performing component is operable to cache a previous positive confirmation that the region of data has been left in a coherency relation with any said Flash Copy image, and to perform I/O activity on the basis of said previous positive confirmation.



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*

HIGH-PERFORMANCE LOCK MANAGEMENT FOR FLASH COPY IN N-WAY
SHARED STORAGE SYSTEMS

Field of the Invention

The present invention relates to the field of computer storage controllers, and particularly to advanced function storage controllers in n-way shared storage systems providing a Flash Copy function.

Background of the Invention

In the field of computer storage systems, there is increasing demand for what have come to be described as "advanced functions". Such functions go beyond the simple I/O functions of conventional storage controller systems. Advanced functions are well known in the art and depend on the control of metadata used to retain state data about the real or "user" data stored in the system. The manipulations available using advanced functions enable various actions to be applied quickly to virtual images of data, while leaving the real data available for use by user applications. One such well-known advanced function is 'Flash Copy'.

At the highest level, Flash Copy is a function where a second image of 'some data' is made available. This function is sometimes known as Point-In-Time copy, or T0-copy. The second image's contents are initially identical to that of the first. The second image is made available 'instantly'. In practical terms this means that the second image is made available in much less time than would be required to create a true, separate, physical copy, and that this means that it can be established without unacceptable disruption to a using application's operation.

Once established, the second copy can be used for a number of purposes including performing backups, system trials and data mining. The first copy continues to be used for its original purpose by the original using application. Contrast this with backup without Flash Copy, where the application must be shut down, and the backup taken, before the application can be restarted again. It is becoming increasingly difficult to find time windows where an application is sufficiently idle to be shut down. The cost of taking a backup is increasing. There is significant and increasing business value in the ability of Flash Copy to allow backups to be taken without stopping the business.

Flash Copy implementations achieve the illusion of the existence of a second image by redirecting read I/O addressed to the second image (henceforth Target) to the original image (henceforth Source), unless that region has been subject to a write. Where a region has been the subject of a write (to either Source or Target), then to maintain the illusion that both Source and Target own their own copy of the data, a process is invoked which suspends the operation of the write command, and without it having taken effect, issues a read of the affected region from the Source, applies the read data to the Target with a write, then (and only if all steps were successful) releases the suspended write. Subsequent writes to the same region do not need to be suspended since the Target will already have its own copy of the data. This copy-on-write technique is well known and is used in many environments.

All implementations of Flash Copy rely on a data structure which governs the decisions discussed above, namely, the decision as to whether reads received at the Target are issued to the Source or the Target, and the decision as to whether a write must be suspended to allow the copy-on-write to take place. The data structure essentially tracks the regions or grains of data that have been copied from source to target, as distinct from those that have not.

Maintenance of this data structure (hereinafter called metadata) is key to implementing the algorithm behind Flash Copy.

Flash Copy is relatively straightforward to implement within a single CPU complex (possibly with SMP processors), as is often employed within modern storage controllers. With a little more effort, it is possible to implement fault tolerant Flash Copy, such that (at least) two CPU complexes have access to a copy of the metadata. In the event of a failure of the first CPU complex, the second can be used to continue operation, without loss of access to the Target Image.

However, the I/O capability of a single CPU complex is limited. Though improving the capabilities of a single CPU complex measured in terms of either I/Os per second, or bandwidth (MB/s) has a finite limit, and will eventually impose a constraint on the performance of the using applications. This limit arises in many implementations of Flash Copy, but a good example is in Storage Controllers. A typical storage controller has a single (or possibly a redundant pair) of CPU complexes, which dictate a limit in the performance capability of that controller.

More storage controllers can be installed. But the separate storage controllers do not share access to the metadata, and therefore do not cooperate in managing a Flash Copy image. The storage space becomes fragmented, with Flash Copy being confined to the scope of a single controller system. Both Source and Target disks must be managed within the same storage controller. A single storage controller disk space might become full, while another has some spare space, but it is not possible to separate the Source and Target disks, placing the Target disk under the control of the new controller. (This is particularly unfortunate in the case of a new Flash Copy, where moving the Target is a cheap operation, as it has no physical data associated with it).

As well as constraining the total performance possible for a Source/Target pair, the constraint of single-controller storage functions adds complexity to the administration of the storage environment.

Typically, storage control systems today do not attempt to solve this problem. They implement Flash Copy techniques that are confined to a single controller, and hence are constrained by the capability of that controller.

A simple way of allowing multiple controllers to participate in a shared Flash Copy relationship is to assign one controller as the Owner of the metadata, and have the other controllers forward all read and write requests to that controller. The owning controller processes the I/O requests as if they came directly from its own attached host servers, using the algorithm described above, and completes each I/O request back to the originating controller.

The main drawback of such a system, and the reason that it is not widely used, is that the burden of forwarding each I/O request is too great, possibly even doubling the total system-wide cost, and hence approximately halving the system performance.

It is known, for example, in the area of distributed parallel database systems, to have a distributed lock management structure employing a two-phase locking protocol to hold locks on data in order to maintain any copies of the data in a coherency relation. However, two phase locking is typically time-consuming and adds a considerable messaging burden to the processing. As such, an unmodified two-phase locking protocol according to the prior art is disadvantageous in systems at a lower level in the software and hardware stack, such as storage area networks having distributed storage controllers

where the performance impact of the passing of locking control messages is even more significant than it is at the database control level.

It would therefore be desirable to gain the advantages of distributed lock management in a Flash Copy environment while incurring the minimum lock messaging overhead.

Summary of the Invention

The present invention accordingly provides, in a first aspect, a storage control apparatus operable in a network of storage controller nodes having an owner storage controller node operable to control locking of a region of data during I/O activity, a messaging component operable to pass at least one message to request a lock, grant a lock, request release of a lock, and signal that a lock has been released; comprising an I/O performing component operable to perform I/O on data owned by any said owner storage controller node, subject to said I/O performing component's compliance with lock protocols controlled by said owner storage controller node; wherein any Flash Copy image of said region of data is maintained in a coherency relation with said region of data; and wherein said I/O performing component is operable to cache a previous positive confirmation that said region of data has been left in a coherency relation with any said Flash Copy image, and to perform I/O activity on the basis of said previous positive confirmation.

Preferably, said I/O performing component is operable to discard a cached positive confirmation and to subsequently request a lock afresh.

Preferably, a reduced cache storage area is managed by selectively discarding a cached positive confirmation.

Preferably, a positive confirmation for said region of data further comprises any positive confirmation for a further region of data that is contiguous with said region of data.

The present invention provides, in a second aspect, a method of storage control in a network of storage controller nodes having an owner storage controller node operable to control locking of a region of data during I/O activity, a messaging component operable to pass at least one message to request a lock, grant a lock, request release of a lock, and signal that a lock has been released, the method comprising the steps of performing I/O on data owned by any said owner storage controller node, subject to compliance with lock protocols controlled by said owner storage controller node;

maintaining Flash Copy of said region of data in a coherency relation with said region of data; and caching a previous positive confirmation that said region of data has been left in a coherency relation with any said Flash Copy image, and performing I/O activity on the basis of said previous positive confirmation.

Preferably, the method of the second aspect further comprises the step of discarding a cached positive confirmation and subsequently requesting a lock afresh.

Preferably, the method of the second aspect further comprises managing a reduced cache storage area by selectively discarding a cached positive confirmation.

Preferably, a positive confirmation for said region of data further comprises any positive confirmation for a further region of data that is contiguous with said region of data.

In a third aspect, the present invention provides a computer program product tangibly embodied in a computer-readable storage medium, comprising computer program code means to, when loaded into a computer system and executed thereon, cause storage control apparatus in a network of storage controller nodes having an owner storage controller node operable to control locking of a region of data during I/O activity, a messaging component operable to pass at least one message to request a lock, grant a lock, request release of a lock, and signal that a lock has been released, to perform the steps of performing I/O on data owned by any said owner storage controller node, subject to compliance with lock protocols controlled by said owner storage controller node; maintaining Flash Copy of said region of data in a coherency relation with said region of data; and caching a previous positive confirmation that said region of data has been left in a coherency relation with any said Flash Copy image, and performing I/O activity on the basis of said previous positive confirmation.

The presently preferred embodiment of the present invention employs a modified two-phase lock messaging scheme to co-ordinate activity among plural storage controllers (or nodes) in an n-way system. The messaging co-ordinates activity between the nodes in the system, but each node is still responsible for performing its own I/O. Each of the nodes is provided with a caching facility to cache the results of its previous lock requests, so that it can reuse certain of the results to avoid the necessity of querying the status of

a region of data if the status is already positively indicated by the cached previous results.

Brief Description of the Drawings

A preferred embodiment of the present invention will now be described by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a flow diagram illustrating one embodiment of a two-phase locking scheme using lock messages to control coherency between a region of data and a Flash Copy image of the data;

Figure 2 shows the system components of a system according to the preferred embodiment of the present invention; and

Figure 3 shows the additional steps of the preferred embodiment of the present invention.

Detailed Description of the Preferred Embodiment

For better understanding of the presently preferred embodiment of the present invention, it is necessary to describe the use of two-phase lock messaging to co-ordinate activity between plural storage controllers (or nodes) in an n-way storage system.

As an example, consider an n-way system implementing Flash Copy. Assume every node has access to the storage managed by the co-operating set of n nodes. One of the nodes is designated as an owner (102) for metadata relating to all I/O relationships of a region of storage. The other nodes are designated as clients. In a presently most preferred embodiment, one of the client nodes is further designated as a backup owner and maintains a copy of the metadata in order to provide continuous availability in the event of a failure of the owner node.

Consider a host I/O request arriving (104) at a particular client node ('C'). Suppose that the host I/O request is either a Read or Write of the Target disk, or possibly a Write of the Source disk. Client C begins processing by suspending (106) the I/O. C then sends (108) a message REQ to the Owner node O, asking if the grain has been copied.

On receipt of message REQ, O inspects its own metadata structures. If O finds that the region has already been copied, O replies (110) with a NACK message. If O finds that the region has not already been copied, it places a lock record against the appropriate metadata for the region within its own metadata structures, and replies (112) with a GNT message. The lock record is required to ensure compatibility between the request just received and granted, and further requests that might arrive affecting the same metadata while the processing at C continues. The details of how the lock record is maintained, and what the compatibility constraints are, are the same as if the I/O had been received locally by O, and are well known to those skilled in the art.

On receipt of a NACK message, C unpends (114) the original I/O request.

On receipt of the GNT message, C continues (116) by performing the data transfer or transfers required by the Flash Copy algorithm. In the case of a Target Read, this means performing the read to the source disk. Some time later, C will process completion (118) for the read request, and will issue (120) an UNL message to O, at the same time as completing the original I/O request to the host system that issued it.

O, on receipt of an UNL message, removes (122) the lock record from its metadata table, thus possibly releasing further I/O requests that were suspended because of that lock. In the presently most preferred embodiment, O then delivers (124) a UNLD message to C, allowing C to reuse the resources associated with the original request. This is, however, not required by the Flash Copy algorithm itself.

In the case of a write (to either Target or Source) C must perform the copy-on-write (127). Having completed all steps of the copy-on-write, and with the original write I/O request still suspended, C issues (126) an UNLC request to O.

O, on receipt of an UNLC message, marks (128) in the metadata the region affected as having been copied, removes (130) the lock record, informs (132) any waiting requests that the area has now been copied, and then issues (134) an UNLD message to C.

C, on receipt of a UNLD message, releases (136) the suspended write operation, which will some time later complete, and then C completes (138) the write operation to the host.

Recovery paths are required to cater for the situation where a disk I/O fails, or the messaging system fails, or a node fails, but the requirements and implementations of these are well understood in the art.

5

The above description was from the point of view of a single I/O, and a single Client C. But it is clear how the scheme continues to operate in the presence of multiple I/Os, from multiple client nodes, with O continuing to process all requests by the same algorithm.

10

Turning now to Figure 2, there is shown an apparatus in accordance with a presently preferred embodiment of the invention, the apparatus embodied in a storage controller network comprising an Owner (202), a Client (204) I/O performing component, a portion of metadata (206) relating to data (208) held under the control of the storage network, a copy (209) of the data (208), and communication means. The apparatus includes an ownership assignment component (210) to assign ownership of metadata to the Owner (202), and a lock management component (212) operable to control locking at said metadata (206) level during I/O activity to ensure coherency with any copy (209). Included also is a messaging component (214) at the Owner (202), the messaging component (214) being operable to pass one or more messages between Client (204) and Owner (202) to request a response regarding a metadata state, grant a lock, request release of a lock, and signal that a lock has been released. The Client (204) is operable to perform I/O on data whose metadata is owned by any Owner (202), subject to the Client's (204) compliance with the lock protocols at the metadata level controlled by said Owner (202).

25

The system and method thus described are capable of handling distributed lock management in an n-way shared storage controller network, but have the disadvantage that there is considerable messaging overhead in the system. This is not burdensome in systems containing relatively few controllers or where there is relatively little activity, but in modern storage systems, such as very large storage area networks, there are likely to be many controllers and a very high level of storage activity. In such circumstances, the avoidance of unnecessary messaging overhead would be advantageous.

30

35

Thus, to improve the processing performance of the system, in the most preferred embodiment of the present invention, each client node is provided with the ability to maintain information which records the last response received from an Owner. Specifically (described in terms of the additions to Figure 1 according to Figure 3), the client node C is permitted to cache (308)

40

the information that it received a NACK after step 114 of Figure 1, or that itself issued and had acknowledged an UNLC/UNLD pair at step 126 and after step 134 of Figure 1.

5 On receipt (302) of a host I/O request as at step 104 of Figure 1, Client C now applies a modified lock control algorithm, as follows.

10 C first inspects its cached data (303), to see if it has a positive indication that the region affected has already been copied. If it has, then it continues (304) with the I/O without sending any protocol messages to O.

15 If the cache contains no such positive indication, the unmodified protocol described above is used. Client C proceeds with step 106 and following of Figure 1. The receipt (306) of a NACK or an UNLC/UNLD pair causes the cache of information to be updated (308), and subsequent I/Os that affect that region, finding this information in the cache at (303), can proceed (304) without issuing any protocol messages.

20 The term 'pessimistic cache' is sometimes used to describe the approach needed in the presently most preferred embodiment of the present invention. This means that the client need not be fully up-to-date with the Owner's metadata; the client may believe an area needs to be copied, and be corrected by the owner (NACK) to say it does not. However, the client must never believe that an area has been copied when the owner knows it has not.

25 The lock caching of the presently preferred embodiment requires certain changes to the client for correct operation. First, the cache must be initialised (301) (to indicate that all regions must be copied) each time a Flash Copy relationship is started (300a). This might be driven in a number of ways, but a message from Owner to Client is the most straightforward to implement. Second, any time a client node might have missed a message (300b) indicating that the cache has been reinitialised (perhaps because of a network disturbance), the client must assume the worst case and reinitialise (301) or revalidate its cache.

35 Further extensions and variations are possible, as will be clear to one skilled in the art. For example the cached information is discardable, as it can always be recovered from the owner node, which has the only truly up-to-date copy. Thus, the client could have less metadata space allocated for caching information than would be required to store all the metadata held on all the nodes. The clients could then rely on locality of access for the

40

I/Os they process to ensure that they continue to benefit from the caching of the lock message information.

5 In a further extended embodiment, a NACK message (and also the GNT or UNLD messages) can carry back more information than that relating to the region being directly processed by the REQ/GNT/UNLC/UNLD messages. Information concerning neighbouring regions that have also been cleaned can be sent from owners to clients.

10 It will be appreciated that the method described above will typically be carried out in software running on one or more processors (not shown), and that the software may be provided as a computer program element carried on any suitable data carrier (also not shown) such as a magnetic or optical computer disc. The channels for the transmission of data likewise may include storage
15 media of all descriptions as well as signal carrying media, such as wired or wireless signal media.

The present invention may suitably be embodied as a computer program product for use with a computer system. Such an implementation may comprise a series of computer readable instructions either fixed on a tangible medium,
20 such as a computer readable medium, for example, diskette, CD-ROM, ROM, or hard disk, or transmittable to a computer system, via a modem or other interface device, over either a tangible medium, including but not limited to optical or analogue communications lines, or intangibly using wireless techniques, including but not limited to microwave, infrared or other
25 transmission techniques. The series of computer readable instructions embodies all or part of the functionality previously described herein.

Those skilled in the art will appreciate that such computer readable instructions can be written in a number of programming languages for use with
30 many computer architectures or operating systems. Further, such instructions may be stored using any memory technology, present or future, including but not limited to, semiconductor, magnetic, or optical, or transmitted using any communications technology, present or future, including but not limited to optical, infrared, or microwave. It is contemplated that such a computer
35 program product may be distributed as a removable medium with accompanying printed or electronic documentation, for example, shrink-wrapped software, pre-loaded with a computer system, for example, on a system ROM or fixed disk, or distributed from a server or electronic bulletin board over a network, for example, the Internet or World Wide Web.

It will be appreciated that various modifications to the embodiment described above will be apparent to a person of ordinary skill in the art.

CLAIMS

1. A storage control apparatus operable in a network of storage controller nodes having an owner storage controller node operable to control locking of a region of data during I/O activity, a messaging component operable to pass at least one message to request a lock, grant a lock, request release of a lock, and signal that a lock has been released; comprising:

an I/O performing component operable to perform I/O on data owned by any said owner storage controller node, subject to said I/O performing component's compliance with lock protocols controlled by said owner storage controller node;

wherein any Flash Copy image of said region of data is maintained in a coherency relation with said region of data; and

wherein said I/O performing component is operable to cache a previous positive confirmation that said region of data has been left in a coherency relation with any said Flash Copy image, and to perform I/O activity on the basis of said previous positive confirmation.

2. An apparatus as claimed in claim 1, wherein said I/O performing component is operable to discard a cached positive confirmation and to subsequently request a lock afresh.

3. An apparatus as claimed in claim 2, wherein a reduced cache storage area is managed by selectively discarding a cached positive confirmation.

4. An apparatus as claimed in claim 1, wherein a positive confirmation for said region of data further comprises any positive confirmation for a further region of data that is contiguous with said region of data.

5. A method of storage control in a network of storage controller nodes having an owner storage controller node operable to control locking of a region of data during I/O activity, a messaging component operable to pass at least one message to request a lock, grant a lock, request release of a lock, and signal that a lock has been released, the method comprising the steps of:

performing I/O on data owned by any said owner storage controller node, subject to compliance with lock protocols controlled by said owner storage controller node;

5 maintaining Flash Copy of said region of data in a coherency relation with said region of data; and

 caching a previous positive confirmation that said region of data has been left in a coherency relation with any said Flash Copy image, and
10 performing I/O activity on the basis of said previous positive confirmation.

6. A method as claimed in claim 5, further comprising the step of discarding a cached positive confirmation and subsequently requesting a lock afresh.
15

7. A method as claimed in claim 6, further comprising managing a reduced cache storage area by selectively discarding a cached positive confirmation.

8. A method as claimed in claim 5, wherein a positive confirmation for said
20 region of data further comprises any positive confirmation for a further region of data that is contiguous with said region of data.

9. A computer program product tangibly embodied in a computer-readable storage medium, comprising computer program code means to, when loaded into a
25 computer system and executed thereon, cause storage control apparatus in a network of storage controller nodes having an owner storage controller node operable to control locking of a region of data during I/O activity, a messaging component operable to pass at least one message to request a lock, grant a lock, request release of a lock, and signal that a lock has been
30 released, to perform the steps of:

 performing I/O on data owned by any said owner storage controller node, subject to compliance with lock protocols controlled by said owner storage controller node;

35 maintaining Flash Copy of said region of data in a coherency relation with said region of data; and

 caching a previous positive confirmation that said region of data has been left in a coherency relation with any said Flash Copy image, and
40 performing I/O activity on the basis of said previous positive confirmation.

GB920020085GB1

ABSTRACT**HIGH-PERFORMANCE LOCK MANAGEMENT FOR FLASH COPY IN N-WAY
SHARED STORAGE SYSTEMS**

5

10

15

Storage control apparatus is operable in a network of storage controller nodes having an owner node operable to control locking of a region of data during I/O activity, a messaging component operable to request locks, grant locks, request release of locks and signal lock release. The apparatus comprises an I/O performing component to perform I/O on data owned by any owner node, subject to compliance with lock protocols controlled by the owner node. Any Flash Copy image of the region of data is maintained in a coherency relation with the region of data, and the I/O performing component is operable to cache a previous positive confirmation that the region of data has been left in a coherency relation with any said Flash Copy image, and to perform I/O activity on the basis of said previous positive confirmation.

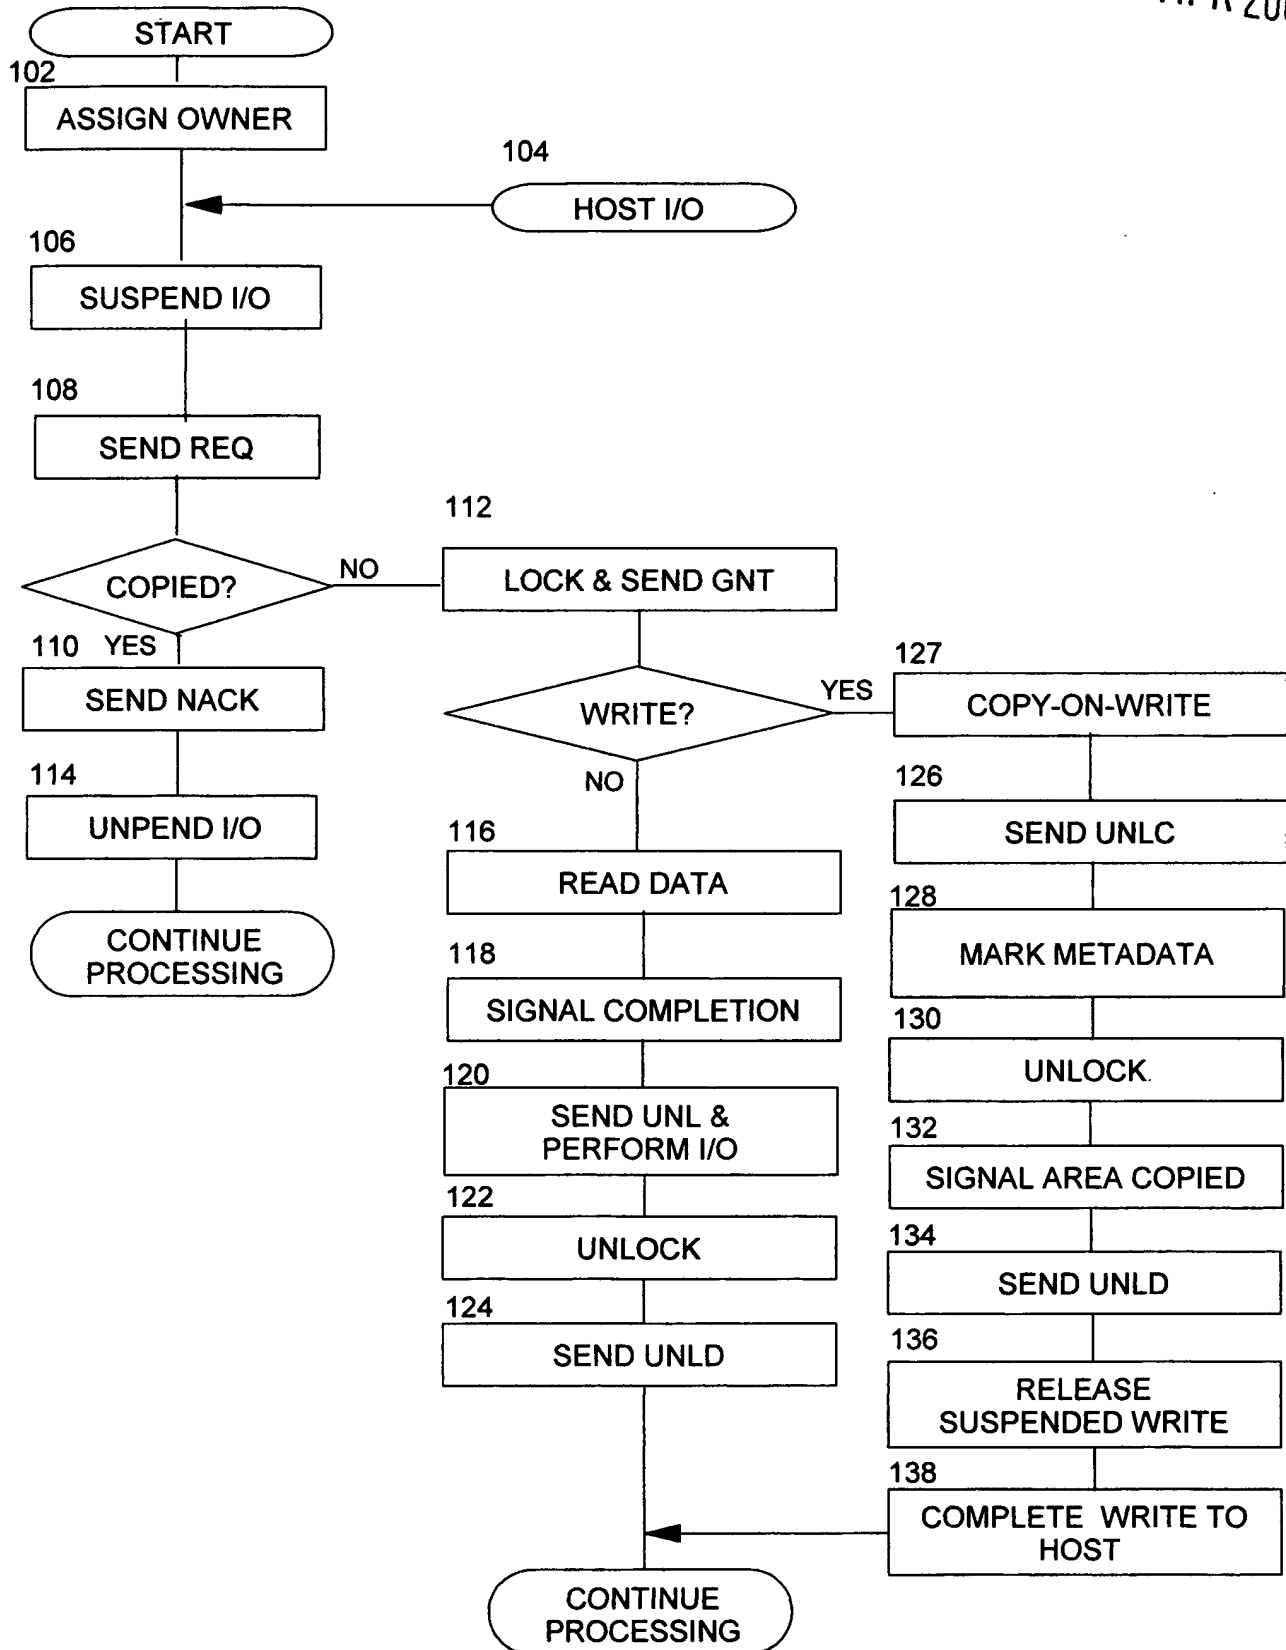
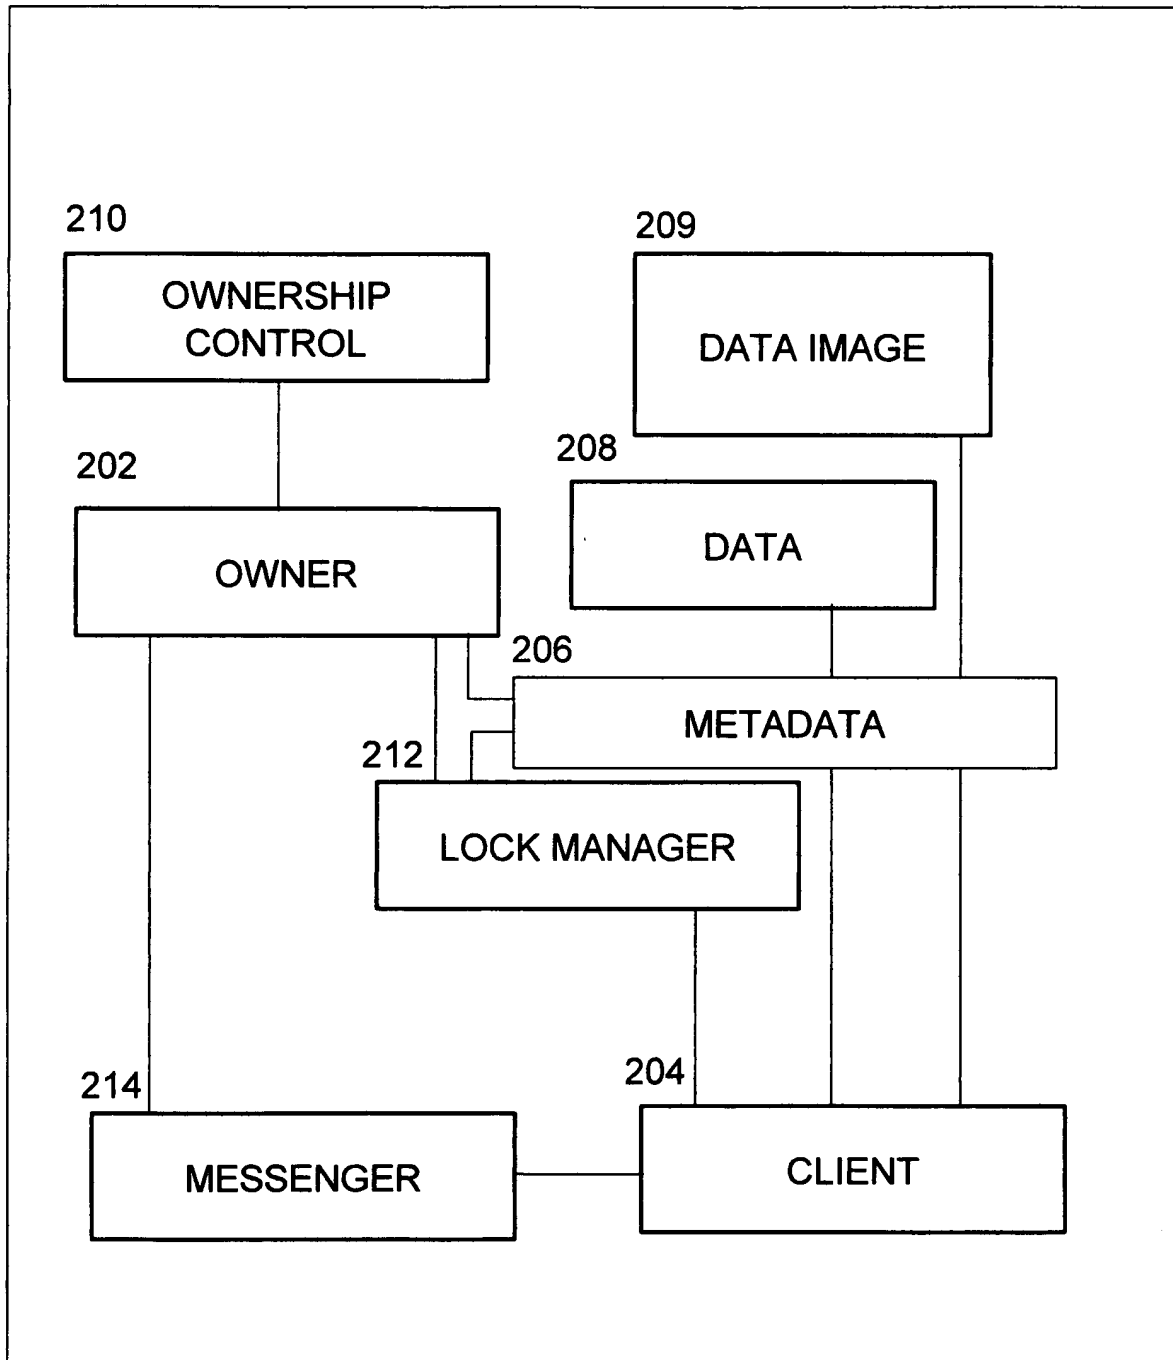


FIGURE 1

200

**FIGURE 2**

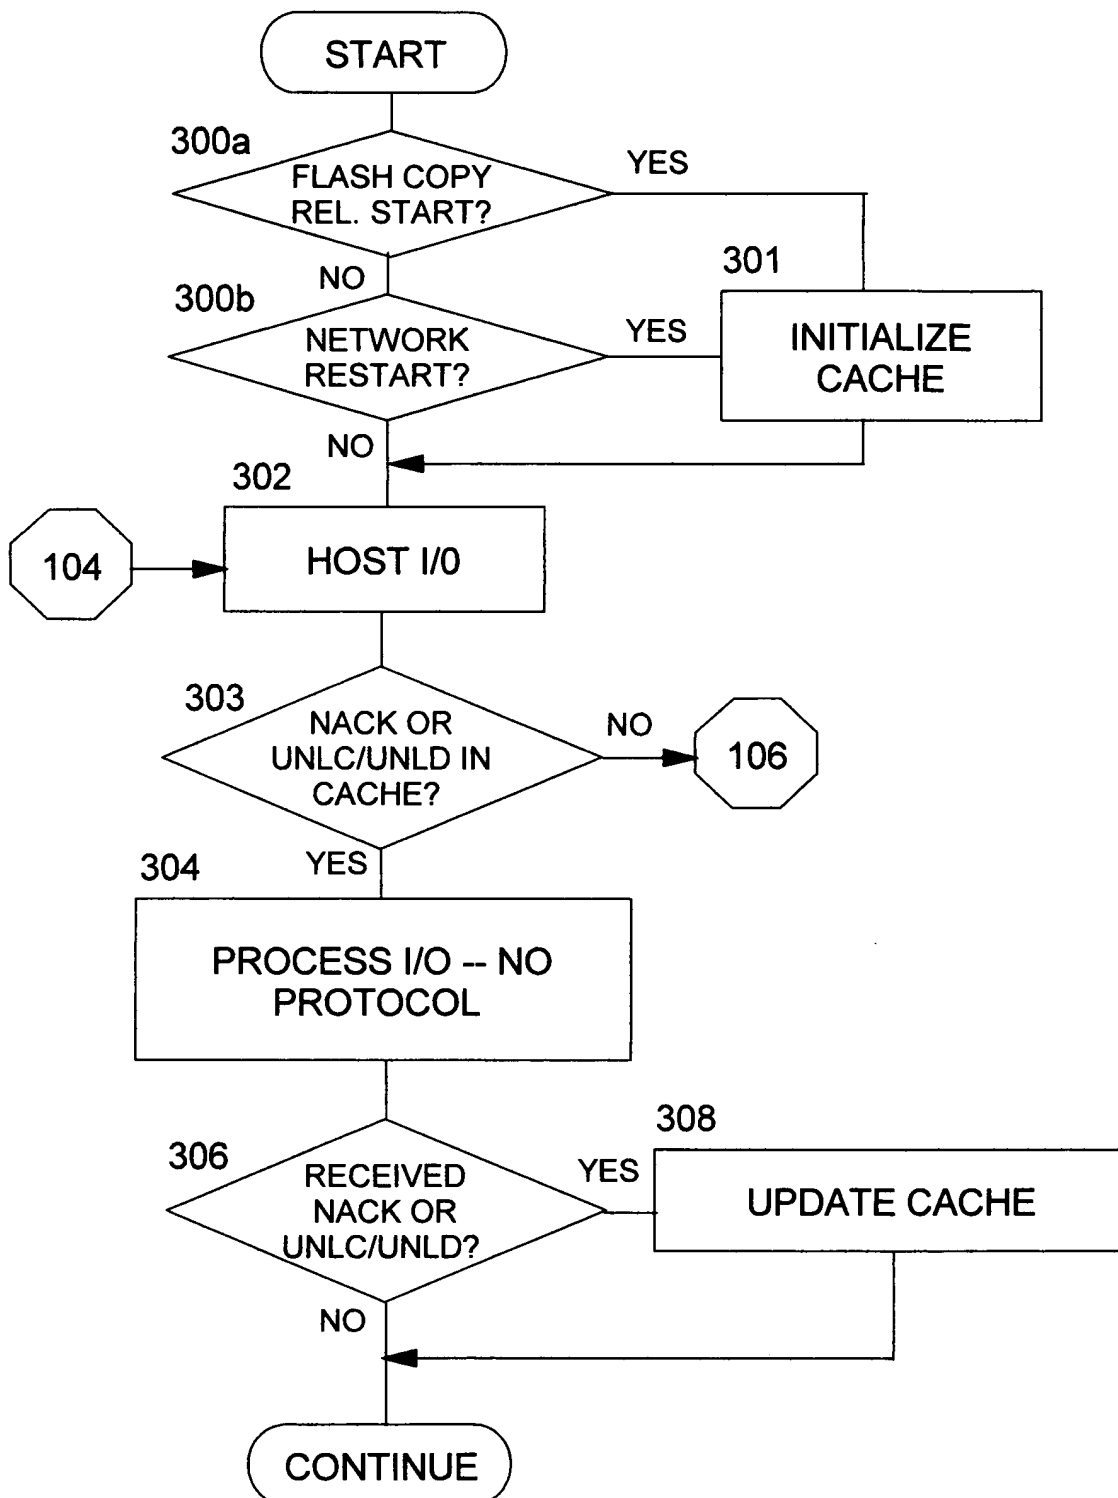


FIGURE 3

INTERNATIONAL SEARCH REPORT

Rec'd PCT/PTO 29 APR 2005

International Application No.

PCT/GB 03/03567

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>S B SIDDHA, K GOPINATH: "A Persistent Snapshot Device Driver for Linux"</p> <p>PROCEEDINGS OF THE 5TH ANNUAL LINUX SHOWCASE AND CONFERENCE - ALS2001, 'Online! 10 November 2001 (2001-11-10), pages 173-182, XP002317993</p> <p>Retrieved from the Internet: URL: http://www.usenix.org/publications/lib/rary/proceedings/als01/full_papers/siddha/siddha.pdf > 'retrieved on 2005-02-16!</p> <p>page 173, right-hand column, lines 6-31</p> <p>page 177, left-hand column, line 22 - right-hand column, line 41</p> <p>page 178, left-hand column, line 22 - right-hand column, line 15</p> <p>-----</p> <p>---/---</p>	1

☒ Further documents are listed in the continuation of box C.☐ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

16 February 2005

Date of mailing of the international search report

03/03/2005

Name and mailing address of the ISA
European Patent Office, P.B. 5618 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fournier, N

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 03/03567

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	BURNS R C ET AL: "Consistency and locking for distributing updates to web servers using a file system" ACM SIGMETRICS PERFORMANCE EVALUATION REVIEW, vol. 28, no. 2, September 2000 (2000-09), pages 15-21, XP002317994 ACM PRESS, NEW YORK, NY, USA ISSN: 0163-5999 page 16, left-hand column, paragraph 1.1 page 16, right-hand column, lines 36-45 pages 17-18, paragraph 2.3 -----	1
X	R C BURNS: "DATA MANAGEMENT IN A DISTRIBUTED FILE SYSTEM FOR STORAGE AREA NETWORKS" PHD THESIS, March 2000 (2000-03), XP002317995 SUBMITTED AT THE UNIVERSITY OF CALIFORNIA, SANTA CRUZ, PAGES 17-38, 79-100	1,2
Y	page 17, line 15 - page 18, line 9 pages 19-23, sections 2.2 and 2.3 pages 27-30, sections 2.4.2 and 2.4.3 page 91, lines 16-20 -----	3
Y	HOWARD J H ET AL: "SCALE AND PERFORMANCE IN A DISTRIBUTED FILE SYSTEM" ACM TRANSACTIONS ON COMPUTER SYSTEMS, ASSOCIATION FOR COMPUTING MACHINERY. NEW YORK, US, vol. 6, no. 1, 1 February 1988 (1988-02-01), pages 51-81, XP000104730 ISSN: 0734-2071 page 58, lines 30-38 -----	3

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference GB020085	FOR FURTHER ACTION <small>see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, Item 5 below.</small>	
International application No. PCT/GB 03/03567	International filing date (day/month/year) 14/08/2003	(Earliest) Priority Date (day/month/year) 29/11/2002
Applicant INTERNATIONAL BUSINESS MACHINES CORPORATION		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

2

☐ None of the figures.

INTERNATIONAL SEARCH REPORT

In International Application No
PCT/GB 03/03567

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>S B SIDDHA, K GOPINATH: "A Persistent Snapshot Device Driver for Linux"</p> <p>PROCEEDINGS OF THE 5TH ANNUAL LINUX SHOWCASE AND CONFERENCE - ALS2001, 'Online! 10 November 2001 (2001-11-10), pages 173-182, XP002317993</p> <p>Retrieved from the Internet: URL: http://www.usenix.org/publications/lib/rary/proceedings/als01/full_papers/siddha/siddha.pdf 'retrieved on 2005-02-16!</p> <p>page 173, right-hand column, lines 6-31 page 177, left-hand column, line 22 - right-hand column, line 41 page 178, left-hand column, line 22 - right-hand column, line 15</p> <p style="text-align: center;">-/-</p>	1

☒ Further documents are listed in the continuation of box C.

☐ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

16 February 2005

Date of mailing of the international search report

03/03/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Fournier, N

INTERNATIONAL SEARCH REPORT

Initial Application No
PCT/GB 03/03567

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	BURNS R C ET AL: "Consistency and locking for distributing updates to web servers using a file system" ACM SIGMETRICS PERFORMANCE EVALUATION REVIEW, vol. 28, no. 2, September 2000 (2000-09), pages 15-21, XP002317994 ACM PRESS, NEW YORK, NY, USA ISSN: 0163-5999 page 16, left-hand column, paragraph 1.1 page 16, right-hand column, lines 36-45 pages 17-18, paragraph 2.3	1
X	R C BURNS: "DATA MANAGEMENT IN A DISTRIBUTED FILE SYSTEM FOR STORAGE AREA NETWORKS" PHD THESIS, March 2000 (2000-03), XP002317995 SUBMITTED AT THE UNIVERSITY OF CALIFORNIA, SANTA CRUZ, PAGES 17-38, 79-100	1,2
Y	page 17, line 15 - page 18, line 9 pages 19-23, sections 2.2 and 2.3 pages 27-30, sections 2.4.2 and 2.4.3 page 91, lines 16-20	3
Y	HOWARD J H ET AL: "SCALE AND PERFORMANCE IN A DISTRIBUTED FILE SYSTEM" ACM TRANSACTIONS ON COMPUTER SYSTEMS, ASSOCIATION FOR COMPUTING MACHINERY. NEW YORK, US, vol. 6, no. 1, 1 February 1988 (1988-02-01), pages 51-81, XP000104730 ISSN: 0734-2071 page 58, lines 30-38	3